

KENWOOD

TM-D750E

144 / 430 MHz DIGITAL DUAL BANDER

THE ULTIMATE DUAL BANDER



**Driving Connectivity to New Heights
in Mobile Communications**

**APRS
&
DIGITAL**

KENWOOD's multiband mobile transceiver: Advanced APRS® and Digital Voice capabilities plus Built-in Wireless LAN take your operating experience to the next level.


APRS

Refined APRS and DIGITAL. Built-in

Fully compatible with the APRS protocol, the TM-D750E enables real-time, two-way data communications, including GPS positional information sharing, text messaging, and even communication via the ISS and other satellites. In addition, its built-in KISS TNC enables advanced APRS operation that reflects KENWOOD's deep expertise, including IGate operation with a connected PC and standalone digipeater operation.

Informative, Large Color LCD Display

The TM-D750E features a brightness-adjustable 3.45-inch TFT color display (320 x 240 pixels, RGB) that is easy-to-see even under sunlight.

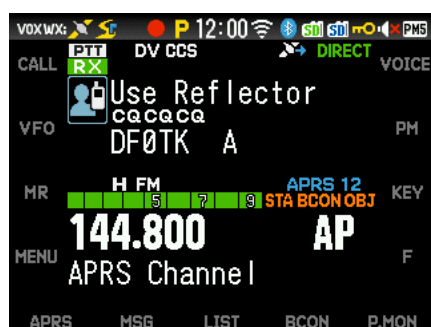

A typical view of the front LCD

Each time a beacon is received, an interrupt screen appears displaying various details, including the packet path, visualizing RF traffic in real time and highlighting the local APRS infrastructure. What's more, at-a-glance relative direction display makes it easy to grasp the information of other stations relative to your own station in real-time. Weather station data can be displayed with colorful icons for easy recognition.

Visual Scan with Waterfall

In addition to showing signal levels currently being received during a scan, history can also be displayed in a vivid, color-rich waterfall format.



Switch to Preset APRS CH

When the APRS function is activated, the transceiver automatically switches to the preset APRS channel, such as 144.80 MHz, eliminating the need for setting up manually.

APRS Menu Settings

A variety of APRS features such as Smart-Beaconing, decay algorithm, proportional pathing, and APRS voice, can be configured with ease from the intuitive menu system.

Station List and Object Functions

Up to 100 stations can be stored, including mobile stations, base stations, weather stations, and objects. You can also filter and sort out the types of stations received. Local information can be transmitted as an "object."

Standalone Digipeater Function

The TM-D750E is capable of operating as a standalone digipeater not only for permanent use at fixed locations but also

as a temporary solution in outdoor scenarios such as atop a hill, extending communication range into weak signal areas.

QSY Function

FM or D-STAR voice channels can be set in no time based on frequency or repeater information embedded in APRS beacons to enable seamless QSY and support the APRS concept of two-way communications.

Text Messaging


Real-time messaging is possible between two APRS stations. Messages can be entered manually or selected from up to 20 user-defined preset phrases, each up to 32 characters.

KISS Mode TNC

The built-in KISS mode TNC for PC connection enables 1200/9600 bps packet communications in APRS operation and infrastructure applications via USB or Bluetooth®.



A variety of intuitive displays for easy grasp of information



Own station/ other station relative display: Shows the position of own station, and relative distance, direction, heading, and speed of other stations



Weather station data including Rainfall, Temperature, Wind direction, Wind speed, Barometric pressure and Humidity



An Interrupt screen showing Packet Path

Wireless LAN Enables Direct Mode.

The TM-D750E supports D-STAR, the amateur radio digital communications protocol that provides both voice and data modes. Both local and overseas QSOs are supported through a number of access methods, including simplex, single repeater, gateway communication or other accessing methods through a network of repeaters and reflectors. The flexibility of D-STAR operation is enhanced even more with Direct Mode via built-in wireless LAN.

D-STAR

D-STAR Compatibility

The D-STAR digital communication protocol featured on the TM-D750E is promoted by the Japan Amateur Radio League (JARL), enabling easy voice and data communication both locally and around the world.

Simple Operation in D-STAR Repeater (DR) Mode

Selecting an access repeater from the preprogrammed list simplifies setup and operation. The TM-D750E also features a direct reply function that enables quick responses after pressing the PTT during gateway communications, along with an icon-based display that confirms accessibility during kerchunk and gateway use.

Simultaneous Reception of Two Digital Voice Channels

Two digital voice channels can be received simultaneously when band A is in DV/DR mode, Direct mode, Reflector Terminal Mode, or Repeater Terminal Mode, and band B is in DV/DR mode. This enables users to monitor two nearby D-STAR repeaters at the same time in DR mode.

Moreover, users can access a D-STAR reflector or a remote D-STAR repeater in Direct mode on Band A, while monitoring a nearby D-STAR repeater on Band B, to further expand operational flexibility.

D-STAR Repeater Monitor

Ongoing communications on remote D-STAR repeaters can be audibly monitored over the Internet using the built-in wireless LAN.

Automatic Host File Updates

When connected to the Internet, the transceiver automatically obtains and updates the latest D-STAR repeater and reflector host files from the KENWOOD website, eliminating the need for manual updates.

Built-in GPS Module / Antenna

High-performance GPS module with patch antenna supports GPS, Galileo, QZSS, and SBAS, providing location data for APRS and D-STAR, with GPS logging and automatic time correction.

Versatile Interface with Standard Compatibility

Equipped with USB Type-C®

connectors and microSD/SDHC card slots on both the operation panel and main unit, each supporting common and individual functions. Bluetooth® (HSP, SPP) is also supported for wireless connectivity.



More Convenience with Free PC Software

The free MCP-D750 Memory Control Program is available for download from the KENWOOD website for Windows PC, enabling easy management of memory channels and various other settings through a user-friendly on-screen interface.

Enhanced Audio Feature

Operation Panel Featuring Built-in Speaker

The TM-D750E delivers clear, easy-to-hear voice communications through expertly tuned audio from the operation panel's built-in speaker (3W output). It also features a DSP-based audio equalizer with a 5-band RX EQ (0.4–6.4 kHz) and a 4-band TX EQ (0.4–3.2 kHz), allowing you to fine-tune the sound to suit your preferences.


Powerful Voice Guidance

Over 900 audio prompts provide clear and intelligible spoken information on operating status shown on the display. Reading of callsigns using the phonetic code is also supported. Voice guidance speed is adjustable at four levels.


WLAN Connection to D-STAR Repeaters/Reflectors

Direct Mode

Access to D-STAR repeaters and reflectors over the Internet got easier than ever with the built-in WLAN (wireless LAN) **Direct Mode**. As the name suggests, this mode connects directly without the need for nearby repeaters or external devices.

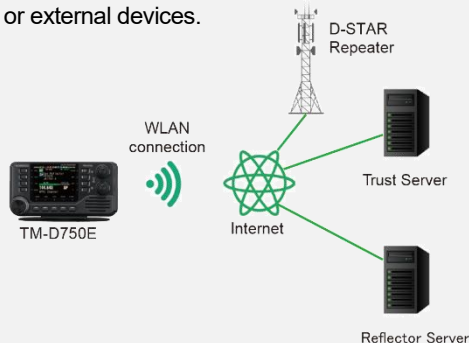

When there are wireless LAN connectivity limitations, **Reflector Terminal Mode** or **Repeater Terminal Mode** can be used to connect Windows PC or Android device running a compatible third-party application via USB or Bluetooth® to access D-STAR reflectors or repeaters over the Internet.

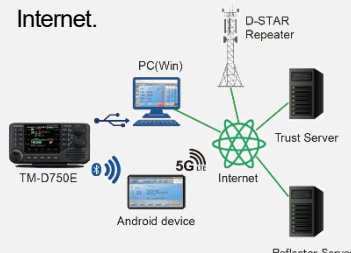

MORE FEATURES

- DV fast data mode in D-STAR • 1000 memory channels • 1500 repeater lists • 30 hotspot lists • 3-step RF output power (144/430MHz: 50/10/5W) • Separate VOL/SQL for A and B bands • 5-channel programmable memory • Full-duplex operation between VHF and UHF • Fixed-band Repeater • Voice recording function (microSD/SDHC) • Voice messaging (4 channels) • Communication log (microSD/SDHC) • Scan modes: Band, MHz, Program, Memory, Memory Group, Call, Priority, D-STAR Repeater • Memory channel lockout • 50 CTCSS frequencies / 104 DCS codes • Cross-tone support • Meter-type display • Frequency direct input • DTMF memory (10 channels) • Dedicated EchoLink DTMF memory (10 channels) • EchoLink node operation • Customizable power-on message and bitmap image • APRS packet monitor • Waypoint output • Date/time display • Frequency step switching • Shift • VOX • Auto repeater offset • Monitor • Auto power-off • Key lock • APRS lock • Memory shift • Key beep on/off • Programmable function key • Display language selection • 3-level mic sensitivity • 9-level LCD brightness • Reset (VFO, Partial, PM, Full)

PRODUCT CONFIGURATIONS

❖ Operation Panel with the Main Unit



SUPPLIED ACCESSORIES

- Keypad Microphone • DC Power Cable
- Panel Cable • Line Filters • Panel Holder
- Panel Bracket • Base Stand • Mounting Bracket • Screw Set • Spare Fuse • Startup Guide • Warranty Card

SPECIFICATIONS

GENERAL	TM-D750E
Frequency Range	TX 144 – 146, 430 – 440 MHz Band A: RX 108 – 174, 410 – 470 MHz Band B: RX 108 – 524 MHz
Mode	TX F1D, F2D, F3E, F7W RX F1D, F2D, F3E, F7W, A3E
Antenna Impedance	50 Ω
Power Requirement	DC 11.7 – 15.9V (Std: DC 13.8V)
Operating Temperature Range	-20°C – +60°C (-4°F – +140°F)
Frequency Stability	Within ±2.0 ppm (-20°C – +60°C, -4°F – +140°F)
Current Drain (TX: DC 13.8V)	
	High 13.0 A / 13.0 A
144 / 430 MHz Band	Mid 6.5 A / 6.5 A
	Low 5.0 A / 5.0 A
Current Drain (RX: Dual band)	Less than 1.3 A (at rated power)
Dimensions (W x H x D)	Projections not included 183.3 x 93 x 36.8 mm Operation Panel 7.22 x 3.66 x 1.44 in Body 140 x 43 x 180 mm 5.51 x 1.69 x 7.09 in
Weight (net)	370 g / 1310 g
Operation panel / Body	13.1 oz / 2.89 lb
RECEIVER	TM-D750E
Circuitry	F1D, F2D, F3E, F7W A3E Double Super Heterodyne Triple Super Heterodyne
Intermediate Frequency	
1 st IF (Band A / Band B)	57.15 MHz / 58.05 MHz
2 nd IF (Band A / Band B)	450 kHz / 450 kHz
3 rd IF (A3E, Band A / Band B)	10.8 kHz / 10.8 kHz
Sensitivity (Typ.)	
• Amateur Band	
FM: 12 dB SINAD	
FM / NFM: 144	0.16 μV / 0.20 μV
Band A FM / NFM: 430	0.16 μV / 0.20 μV
(MHz) DV: PN9/GMSK 4.8 kbps, BER 1%	
144 / 430	0.22 μV / 0.22 μV
AM: 10 dB S/N	0.50 μV
FM: 12 dB SINAD	
FM / NFM: 144	0.16 μV / 0.20 μV
Band B FM / NFM: 430	0.16 μV / 0.20 μV
(MHz) DV: PN9/GMSK 4.8 kbps, BER 1%	
144 / 430	0.22 μV / 0.22 μV
AM: 10 dB S/N	0.50 μV

RECEIVER (cont'd)	TM-D750E
Sensitivity (Typ.)	
• Except for Amateur Band	
AM: 10 dB S/N	
Band A / B	118 – 174 0.40 μV / 0.40 μV
(MHz)	216 – 240 – / 0.50 μV
	410 – 470 0.40 μV / 0.40 μV
FM: 12 dB SINAD	
Band A / B	118 – 144 0.32 μV / 0.32 μV
(MHz)	146 – 175 0.32 μV / 0.32 μV
	200 – 222 – / 0.40 μV
	225 – 240 – / 0.40 μV
	380 – 400 – / 0.56 μV
	400 – 430 0.28 μV / 0.28 μV
	440 – 490 0.28 μV / 0.28 μV
	490 – 524 – / 0.56 μV
Squelch (Typ)	Band A / B 0.10 μV / 0.10 μV
Spurious	144 MHz: A / B 60 dB or more / 60 dB or more
Rejection	430 MHz: A / B 60 dB or more / 60 dB or more
IF Rejection	A / B 60 dB or more / 60 dB or more
Channel Selectivity	-6 dB 12 kHz or more
	-50 dB 30 kHz or less
Audio Output	8 Ohm load 3 W or more
TRANSMITTER	TM-D750E
TX Power Output	High 50 W
	Mid 10 W
	Low 5 W
Modulation	FM Reactance Modulation
	DV GMSK Reactance Modulation
Modulation Deviation	FM ±5.0 kHz
	FMN ±2.5 kHz
Spurious Emissions	-60 dBc or less
Modulation Distortion	
	300 Hz – 3 kHz 3% or less
Microphone Impedance	600 Ω
GPS	
Satellite Systems	GPS, QZSS, Galileo, SBAS
Wireless Connection	
Bluetooth	Version 5.0, HSP/SPP
WLAN Frequency Range	2.4 GHz, 5 GHz
	802.11 a/b/g/n/ac
WLAN Security	WPA2-PSK (AES), WPA2/WPA3 Transitional, WPA3-SAE

Except for sensitivity, these specifications are guaranteed for Amateur Bands only. JVCKENWOOD follows a policy of continuous advancement in development; for this reason, specifications, and design may change without notice.

OPTIONAL ACCESSORIES

PG-2N
DC Power Cable



MC-62
Keypad Microphone
(16-key)*



*Equivalent to the supplied accessory

Specifications, design, and availability of accessories may vary due to technological advancements.

• The APRS® trademark is registered in the United States and is used with permission of Tucson Amateur Packet Radio Corp., its assignee. • D-STAR (Digital Smart Technology for Amateur Radio) is a digital radio protocol developed by JARL (Japan Amateur Radio League). • EchoLink® is a registered trademark of Synergenics, LLC in the United States. • The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc., and any use of such marks by JVCKENWOOD is under license. • USB Type-C® and USB-C® are registered trademarks of USB Implementers Forum. • Windows® is a registered trademark of Microsoft Corporation in the United States and/or other countries. • All other company names, brand names, and product names are registered trademarks or trade names of their respective holders.

Copyright © 2026 JVCKENWOOD Corporation. All Rights Reserved.

JVCKENWOOD Europe B.V. Benelux Branch

Leuvensesteenweg 250/A - 1800 Vilvoorde – Belgium
BTW BE 0457 188 516